


Operation Instructions of Controller (4 in 1)

1. Specifications:

Working temperature: -20-60 °C
Output: 4 CMOS drain- open output
Net weight: 45g
RF frequency: 2.4GHz
PWM: 2KHz

Controller supply voltage: DC12~24V
Connecting Mode: Common anode
Product size: L70*W40*H20mm
Wireless-sync-control
Max load current:
4*4A/DIM; 4*4A/CCT; 3*5A/RGB; 4*4A/RGBW


Controller has wireless synchronization function(not only static mode but also dynamic mode), keep the distance of same zone devices less than 10m, like



Remote control:

Controller are delivered with common control model, it can be controlled by any one remote which is compatible with it. Please pair it with the remote if zone-setting or unique-control is needed, you can find the instructions of the operation from the remote control manual. Or please contact the seller for more information.

2. Interface Specifications

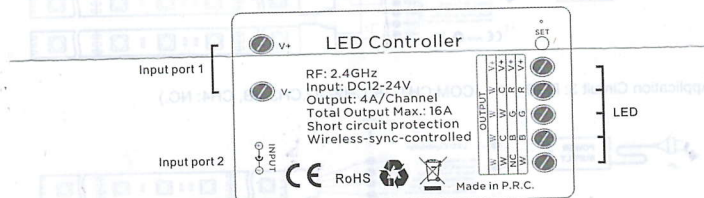

3. Direction for use

Step 1: Connect the load wire at first, followed by the power wire, please ensure short circuit can not occur between wires before turning on the power;

Step 2: Setting the type of output as blow, please ensure the indicate light in correct color according to the loading LED's type:

